




Sistemas Desktop de laminado ACF/preadhesión

La base del sistema Desktop de laminado ACF es el módulo ACF. Este módulo coloca la cinta ACF exactamente encima de las piezas cargadas previamente en las herramientas. Antes de realizar el laminado o la preadhesión de la película ACF con el sustrato, la cinta ACF se corta previamente a la longitud necesaria desde una bobina de ACF. Se corta con el método de medio corte, que corta el material ACF en cuestión. La capa superior se utiliza para transportar la cinta. A continuación, la ACF se coloca sobre la superficie de unión. Al colocar la barra caliente sobre el material ACF, se lleva a cabo el laminado o preadhesión. Después del ciclo de preadhesión, el cabezal regresa a la posición superior y la cinta del soporte se despegue mediante el módulo separador automático. Se recomienda usar el módulo intercalador opcional Sarcon entre la barra caliente y la ACF.


AMADA[®]

AMADA WELD TECH

OUR TECHNOLOGIES



OUR SALES OFFICES

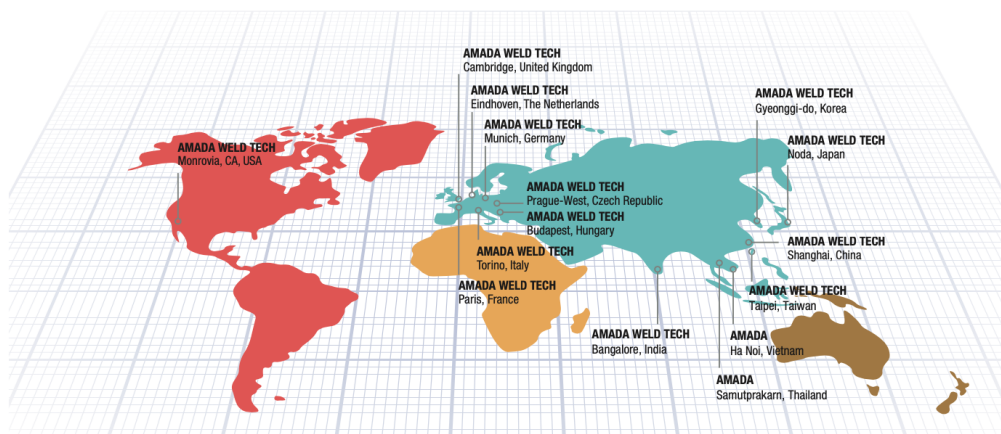

AMADA WELD TECH GmbH
Lindberghstrasse 1 • DE-82178 Puchheim, Germany
T: +49 (0) 89 83 94 030 • Fax : +49 (0) 89 839403 68
info@amada-weldtech.eu • www.amada-weldtech.eu
ISO 9001 Certified Company

Please contact our worldwide
network here:



follow us on:



All data, images and text are subject to change at any time. AMADA WELD TECH GmbH reserves the right to change, modify, delete and add technical specifications and product details at any time without prior notification. © 2020 AMADA WELD TECH GmbH.

WWW.AMADAWELDTECH.EU