



MM-315B – Hordozható hegesztés-ellenőrző berendezés

Az MM-315B az ellenállásos ponthegesztőkhöz használt hordozható, többfunkciós ellenőrző készülék.

Ez a zsebben elférő hegesztés-ellenőrző készülék tökéletes mindenfajta ellenállásos ponthegesztő hibaelhárításához. Szó szerint a tenyerén hordozza az összes hegesztési adatot.

Specifikációk MM-315B – Hordozható hegesztés-ellenőrző berendezés

- > Méri a hegesztés áramerősségét, a hegesztési ciklust és a vezetési fokot
- > Akkumulátormentes memória
- > Automatizálást lekapcsoló rendszer
- > Akár 9 impulzusos memóriakapacitás
- > Nagy, jól látható folyadékkristályos kijelző
- > Olaj- és porállító tok


Specifications MM-315B – Hordozható hegesztés-ellenőrző berendezés

Current measurement range	1.00-9.99 kA (Lo range) / 5.0 - 49.9 kA (Hi Range)	1.00-9.99 kA (Lo range) / 5.0 - 49.9 kA (Hi Range)
Current measurement mode	Arithmetic average RMS of measuring range	Arithmetic average RMS of measuring range
Current accuracy	9.99 kA range. Single phase AC power supply: +/- (1% rdg + 9 dgt). DC inverter power supply: +/- (1% rdg + 15 dgt)	49.9 kA range. Single phase AC power supply: +/- (1% rdg + 3 dgt). DC inverter power supply: +/- (1% rdg + 5 dgt)
Current start cycle of measurment	1-99 cycle	1-99 cycle
Current finish of measurement	AC 2% or below full scale	DC 75% or below of previous cycle
Megjelenít? jegyek	3 digits	3 digits
Time measuring range	AC 1-99 cycle	DC 1-40 cycle per 0.01 - 0.80 sec.
Time measurement mode	All welding cycle or time	All welding cycle or time
Pontosság	+/- 0 cycle per +/- 0.01 sec	+/- 0 cycle per +/- 0.01 sec
Time display digits	2 digits	2 digits
Conduction angle measuring range	30-80 degree	30-80 degree
Conduction angle measurement mode	Maximum conduction angle of measuring range	Maximum conduction angle of measuring range
Conduction angle accuracy	+/- 9 degree	+/- 9 degree
Conduction angle display digits	3 digits	3 digits
Áramforrás	Nickel hydrate battery 1.2 V x 4 pcs (Time for continuous run: 10 hrs)	

Drawings MM-315B – Hordozható hegesztés-ellenőrző berendezés

MM 315B = 500g

Dimensions in mm

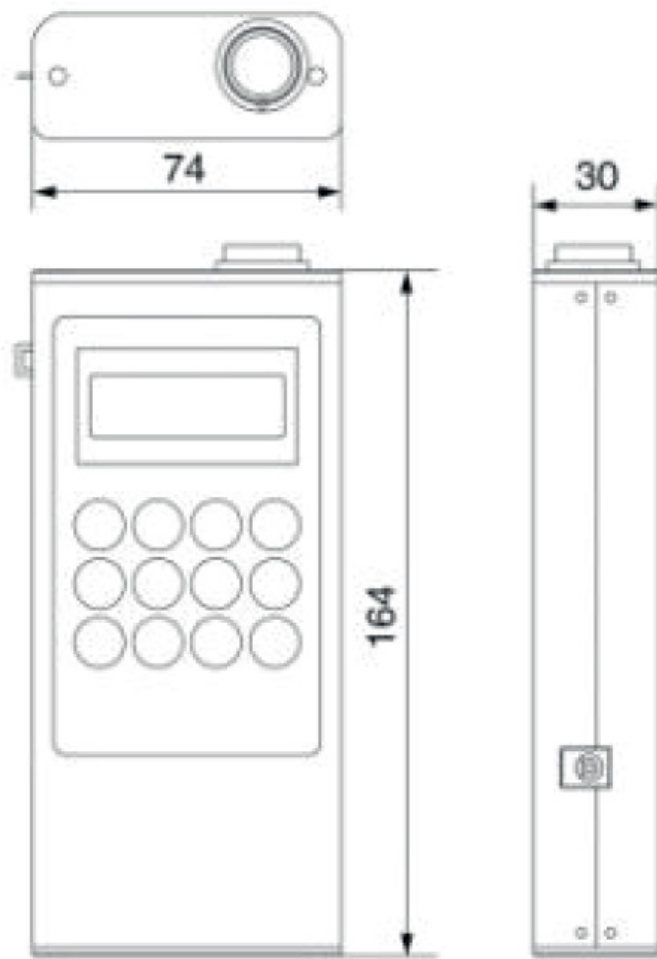

AMADA®

AMADA WELD TECH

OUR TECHNOLOGIES



RESISTANCE WELDING



LASER WELDING



LASER MARKING



HERMETIC SEALING



HOT BAR REFLOW
SOLDERING & BONDING



SYSTEMS SOLUTIONS




LASER CUTTING



MICRO TIG WELDING

OUR SALES OFFICES

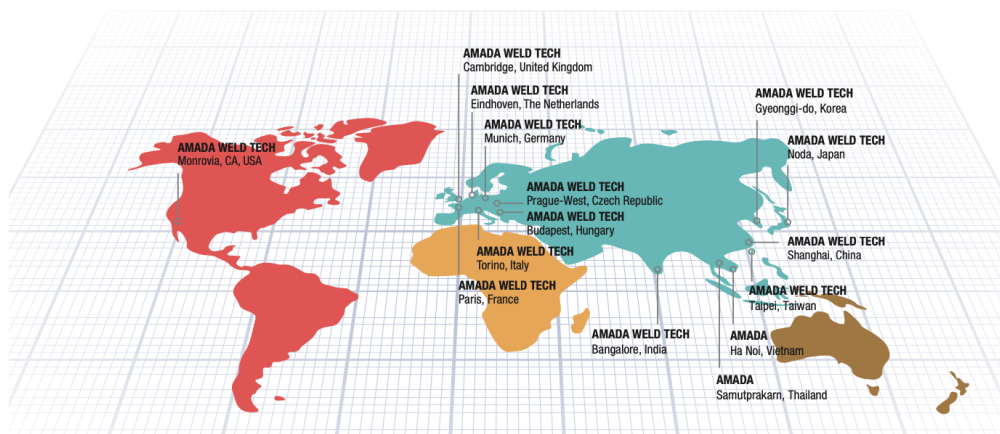

AMADA WELD TECH GmbH
Lindberghstrasse 1 • DE-82178 Puchheim, Germany
T: +49 (0) 89 83 94 030 • Fax : +49 (0) 89 839403 68
info@amada-weldtech.eu • www.amada-weldtech.eu
ISO 9001 Certified Company

Please contact our worldwide
network here:



follow us on:



All data, images and text are subject to change at any time. AMADA WELD TECH GmbH reserves the right to change, modify, delete and add technical specifications and product details at any time without prior notification. © 2020 AMADA WELD TECH GmbH.

WWW.AMADAWELDTECH.EU